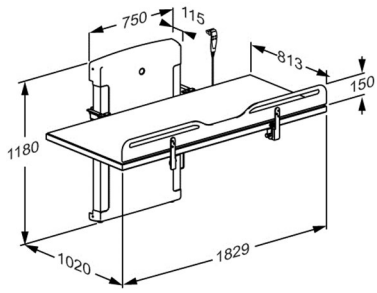




PRESSALIT®

Product Item number	CT 4000 change table, manually foldable, electrically height adjustable R8584572000
Colour	VVS: 777541100 EAN: 5708590358130 HMI: 125834 White
Product description	 <p>The CT 4000 series has been designed for public changing facilities and schools.</p> <p>CT 4000 change table, manually foldable. Electrically height adjustable with buttons placed in table front. Incl. safety rail, body belt and wired remote control. Excl. mounting kit. Lying surface 813 x 1829 mm in compact laminate. Outer measurements 1020 mm x 1829 mm Excl. mounting kit.</p>
Adjustability Adjustment height Product capacity Speed Noise level	Height adjustable 700 mm Maximum load: 200 kg. When the table is loaded with 200 kg, each mounting bolt supports 33 kg <i>This product has been tested statically with a load of 500 kg as the IEC 60601-standard requires testing with safety factor 2.5.</i> Speed up mm: 15 mm/s Speed down mm: 20 mm/s 48 dB
Mains connection (V) Actuator (motor) Control box	230 LA40 (Linak) SMPS14 (Linak)













PRESSALIT®

Product Item number	CT 4000 change table, manually foldable, electrically height adjustable R8584572000
Wired remote control	HB3 (Linak) IP66
Power consumption (maximum load)	Power consumption by maximum load: 70 W Power consumption by standby: 2 W
Warranty	Pressalit makes a commitment to remedy material and manufacturing defects for a period of three years from the invoicing date.
WEEE	Please enquire of your local Pressalit subsidiary or distributor (in countries where there is no subsidiary) that will arrange for recycling of electronic waste in accordance with the WEEE directive.
Declaration of conformity	This product complies with the requirements of Council Directive 93/42/EEC concerning medical devices, as last amended by Council Directive 2007/47/EC of 5 September 2007. It also complies with all relevant requirements in the Council Directive 2006/42/EC (of 17 May 2006) on machinery and the Council Directive 2011/65/EC on RoHS.











Product	CT 4000 change table, manually foldable, electrically height adjustable
Item number	R8584572000

Installation in different wall types

	<p>Concrete >B25</p> <p>V8608 - Mounting kit, 6 coach screws Ø10 x 70 - plugs SX12. To be ordered separately.</p>	
	<p>Solid Brick >= Mz12</p> <p>V8608 - Mounting kit, 6 coach screws Ø10 x 70 - plugs SX12. To be ordered separately.</p>	
	<p>Solid Sand Lime Brick >= Hlz12</p> <p>V8608 - Mounting kit, 6 coach screws Ø10 x 70 - plugs SX12. To be ordered separately.</p>	
	<p>Aerated Concrete P4</p> <p>V8658 - Mounting kit, 6 coach screws Ø10 x 70 - plugs GB14. To be ordered separately.</p>	
	<p>Drywall (2 x 12,5 mm) water-resistant, re-enforced with wood</p> <p>V8608 - Mounting kit, 6 coach screws Ø10 x 70 - plugs SX12. NB! Plugs are not needed. To be ordered separately.</p>	



PRESSALIT®

Product Item number	CT 4000 change table, manually foldable, electrically height adjustable R8584572000		
	Drywall (2 x 12,5 mm) water-resistant, re-enforced with 22 mm plywood Wall fasteners (6 pcs) must be bought separately, for drywall it is possible to use e.g. fischer KD8 toggles or similar.		
	Drywall (2 x 12,5 mm) water-resistant, re-enforced with steel plates (2 mm) Wall fasteners (6 pcs) must be bought separately, for drywall it is possible to use e.g. fischer KD8 toggles or similar.		
	Drywall (2 x 12,5 mm) water-resistant Mounting in this wall type is not recommended - risk of fatal injury to persons and walls.		

It is the responsibility of the installer to ensure that suitable wall fasteners are used.



www.pressalit.com

Pressalit A/S
Pressalitvej 1
DK-8680 Ry
Tel.: +45 8788 8788
Fax: +45 8788 8789
E-mail: pressalit@pressalit.com

PRESSALIT®