





## Liberty Open Platform Lift



LL800 / LL900 / LL1100

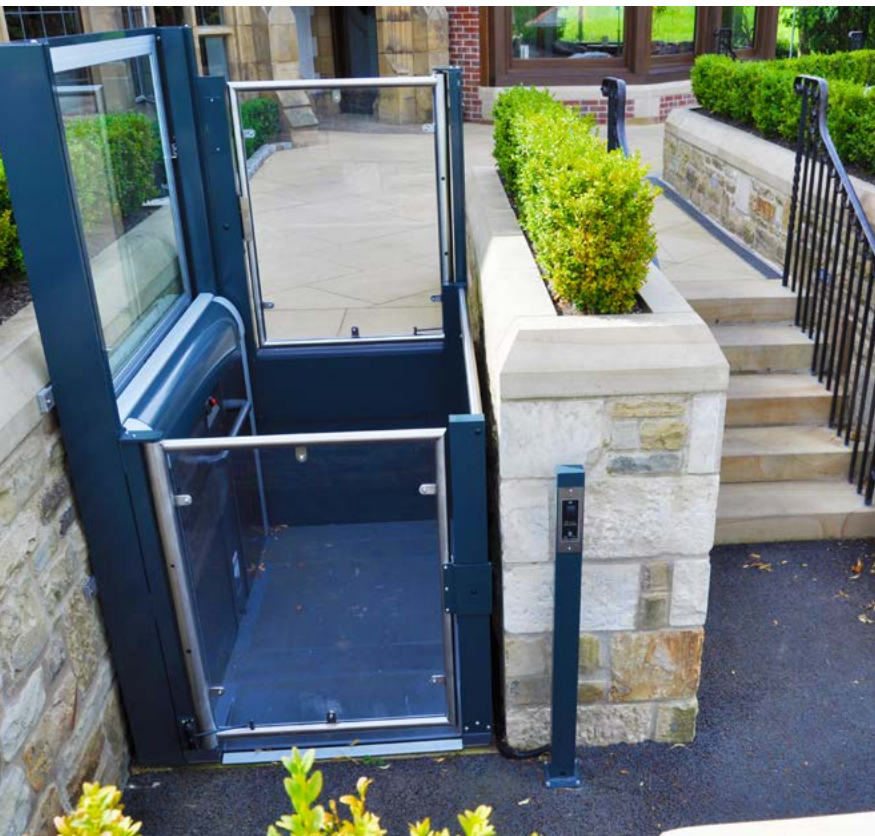

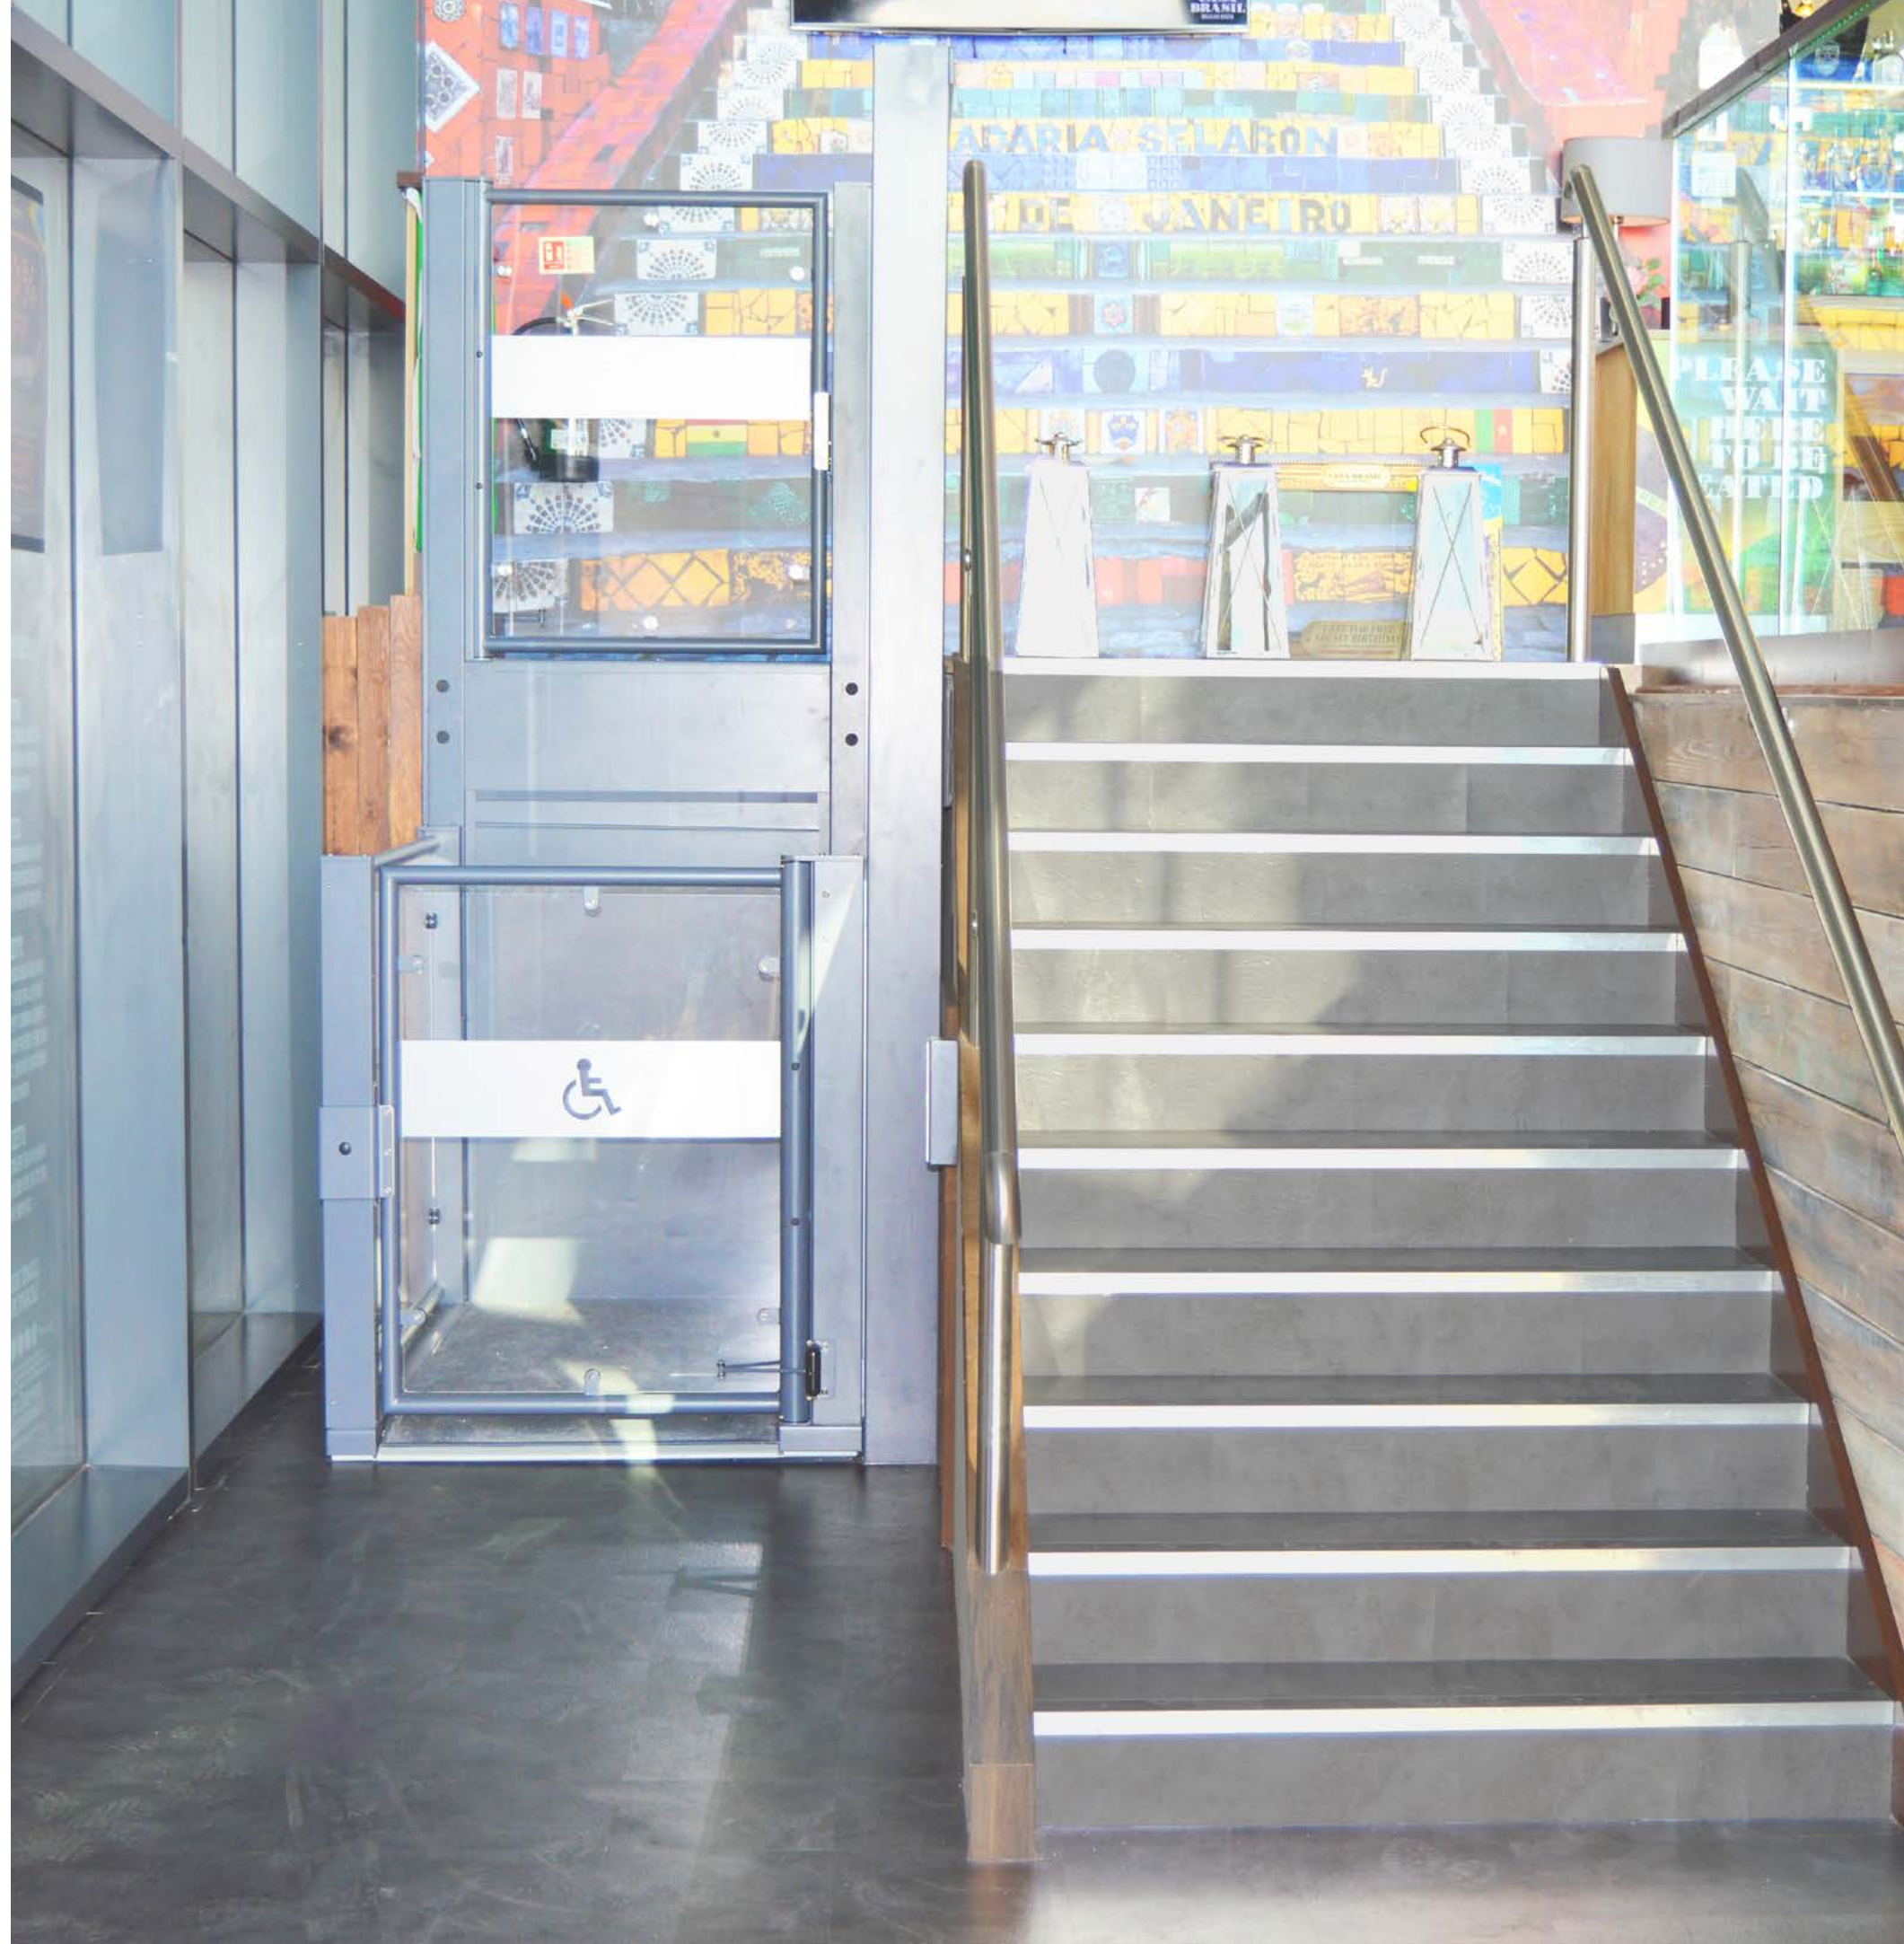

The Wessex LL Series has been designed for safety, flexibility and independence.

Building on an impressive pedigree spanning four decades of design innovation the LL Series encapsulates the qualities embedded in every Wessex Lift.

Robust  
Simple  
Aesthetic

Flexible  
Stylish  
Creative



5 year Anti-corrosion Warranty

# Standard Options



High Specification Controls



Keyswitch



Clear Panel Gates



Power Operated Gates



External Application



Special Colours and Finishes



Clear Side Panels

# Technical Specification

| Standard Specifications             | LL800         | LL900         | LL1100         |                     |                     |
|-------------------------------------|---------------|---------------|----------------|---------------------|---------------------|
|                                     |               |               | Through Access | On long, off narrow | On narrow, off long |
| Platform Safety Edges               | ✓             | ✓             |                | ✓                   |                     |
| 24v Controls                        | ✓             | ✓             |                | ✓                   |                     |
| Battery Back Up                     | ✓             | ✓             |                | ✓                   |                     |
| Emergency Manual Lowering           | ✓             | ✓             |                | ✓                   |                     |
| Suitable for External Application   | ✓*            | ✓*            |                | ✓*                  |                     |
| Manual Interlocked Upper Gate       | ✓             | ✓             |                | ✓                   |                     |
| Manual Interlocked Lower Gate       | ✓             | ✓             |                | ✓                   |                     |
| Through Access                      | ✓             | ✓             | ✓              | N/A                 | N/A                 |
| Side Access                         | N/A           | N/A           | N/A            | ✓                   | ✓                   |
| Maximum Threshold Height mm         | 3000          | 3000          | 3000           |                     |                     |
| Safe Working Load kg                | 300           | 300           | 300            |                     |                     |
| Usable Platform Dimensions mm       | 1460 x 800    | 1460 x 900    | 1460 x 1100    |                     |                     |
| Lift Size mm                        | 1520 x 1240   | 1520 x 1340   | 1520 x 1390    | 1520 x 1390         | 1520 x 1460         |
| Lift Speed mm/ sec                  | 80            | 80            | 80             |                     |                     |
| Power Supply - Single Phase & Earth | 230v ac 50 Hz | 230v ac 50 Hz | 230v ac 50 Hz  |                     |                     |

- ✓ CE Marked
- ✓ Conforms to BS6440

\* Available as a cost option.

British Design & Manufacture

